


Table for standard stroke

Tube I.D.	Stroke (mm)
ø10	25,50,75
ø16, 20, 25, 32	25,50,75,100,125,150,175,200

Order example

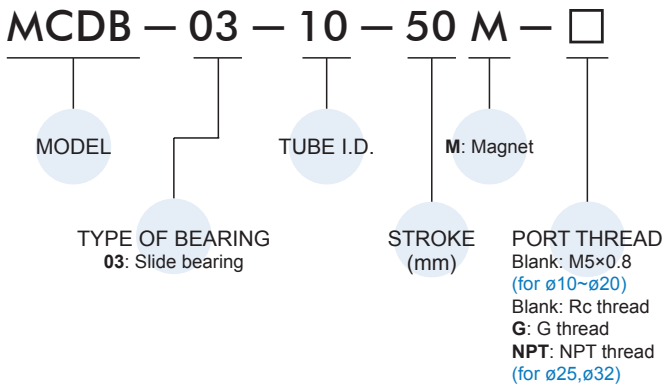

Features

- Compact in width and length with precision guidance.
- High lateral loads can be applied on both slide and linear bearing unit.
- Can be used as body or end plate sliding mechanism.
- Can have shock absorbers fitted enabling absorption of high loads with low noise.



Specification

Model	MCDB		
Acting type	Double acting		
Tube I.D. (mm)	10,16	20	25,32
Port size	M5×0.8		Rc1/8
Medium	Air		
Min operating pressure	0.15 MPa	0.1 MPa	
Max operating pressure	1 MPa		
Proof pressure	1.5 MPa		
Available Temperature range	-5~+60°C (No freezing)		
Lubricator	Not required		
Available speed range	50~500 mm/sec		
Cushion	Shock absorber		
Stroke adjustable range	Stand stroke ±2mm		
Sensor switch (*)	RCD		

* RCD specification, please refer to page 8-9.


Installation of sensor switch

Sensor switch: RCD

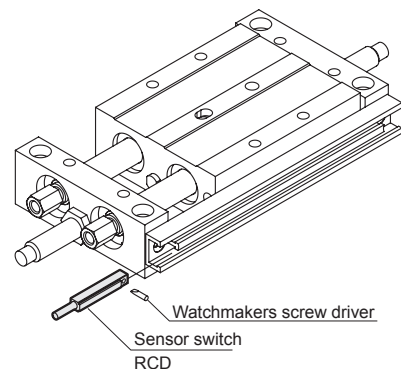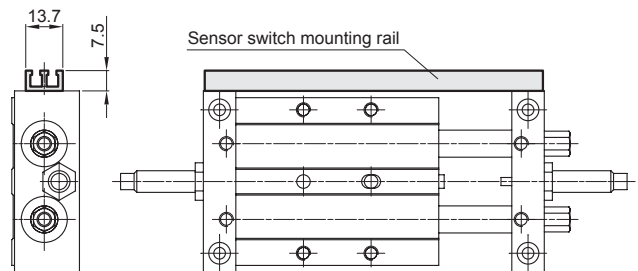


MCDB Inside structure & Parts list $\varnothing 10, \varnothing 16, \varnothing 25$

$\varnothing 10$

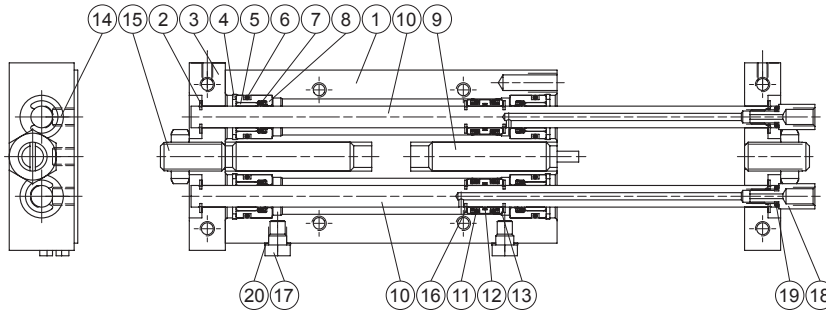

$\varnothing 16, \varnothing 25$

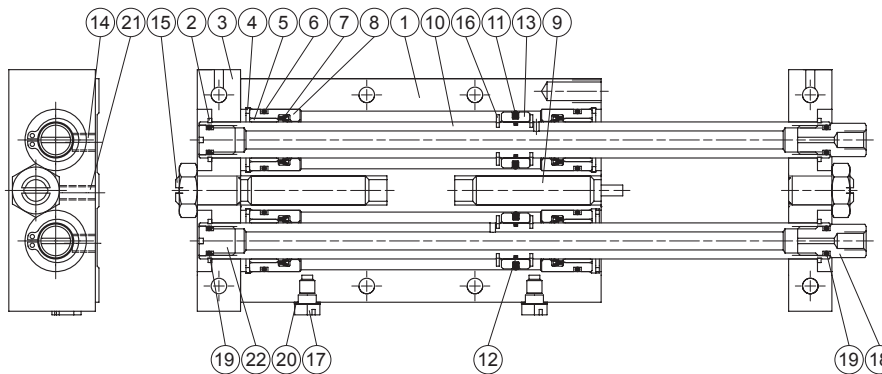

Material

No.	Part name	Material	Q'y	Repair kits (inclusion)
1	Body	Aluminum alloy	1	
2	Snap ring #1	Spring steel	4	
3	Connector	Aluminum alloy	2	
4	Snap ring #2	Spring steel	4	
5	Rod bush	Bearing alloy	4	
6	Cover gasket	NBR	4	●
7	Rod packing	NBR	4	●
8	Rod cover	Aluminum alloy	4	
9	Absorber	—	2	
10	Piston rod	Carbon steel	2	
11	Piston packing	NBR	2	●
12	Piston gasket	NBR	2	●
13	Piston	Aluminum alloy	2	
14	Set screw #1	Carbon steel	4	
15	Set screw #2	Carbon steel	2	
16	Snap ring #3	Spring steel	4	
17	Plug #1	Copper	2	
18	Fitting	Steel	2	
19	O-ring for fitting	NBR	4	●
20	Plug gasket	Plastic	2	
21	Set screw #3	Carbon steel	2	
22	Plug #2	Copper	2	


Order example of repair kits

Tube I.D.	Repair kits
$\varnothing 10$	PS-MCDB-10
$\varnothing 16$	PS-MCDB-16
$\varnothing 25$	PS-MCDB-25

MCDB Inside structure & Parts list $\varnothing 20, \varnothing 32$

DUAL-ROD SLIDE CYLINDER

$\varnothing 20, \varnothing 32$

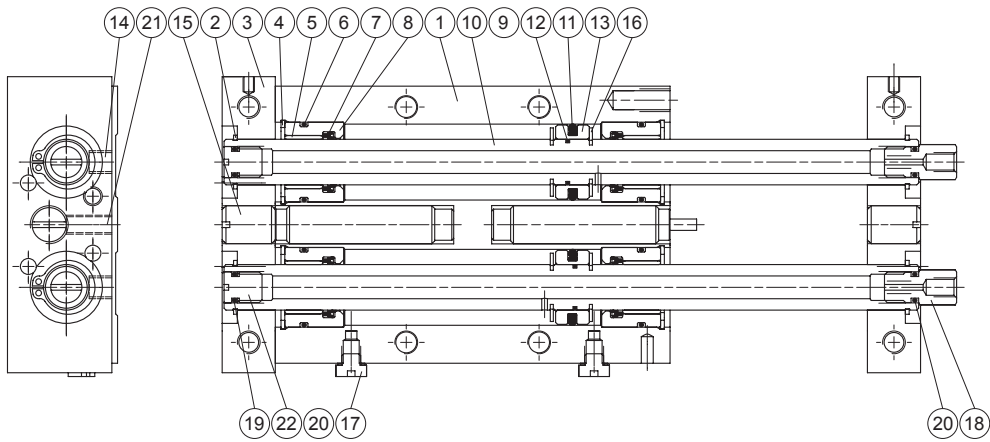

Material


No.	Part name	Material	Q'y	Repair kits (inclusion)
1	Body	Aluminum alloy	1	
2	Snap ring #1	Spring steel	4	
3	Connector	Aluminum alloy	2	
4	Snap ring #2	Spring steel	4	
5	Rod bush	Bearing alloy	4	
6	Cover gasket	NBR	4	●
7	Rod packing	NBR	4	●
8	Rod cover	Aluminum alloy	4	
9	Absorber	—	2	
10	Piston rod	Carbon steel	2	
11	Piston packing	NBR	2	●
12	Piston gasket	NBR	2	●
13	Piston	Aluminum alloy	2	
14	Set screw #1	Carbon steel	4	
15	Set screw #2	Carbon steel	2	
16	Snap ring #3	Spring steel	4	
17	Plug #1	Copper	2	
18	Fitting	Steel	2	
19	O-ring for fitting	NBR	4	●
20	Plug gasket	Plastic	2	
21	Set screw #3	Carbon steel	2	
22	Plug #2	Copper	2	

Order example of repair kits

Tube I.D.	Repair kits
$\varnothing 20$	PS-MCDB-20
$\varnothing 32$	PS-MCDB-32

MCDB-03 Dimensions $\varnothing 10, \varnothing 16, \varnothing 25$ stroke: 25

DUAL-ROD SLIDE CYLINDER

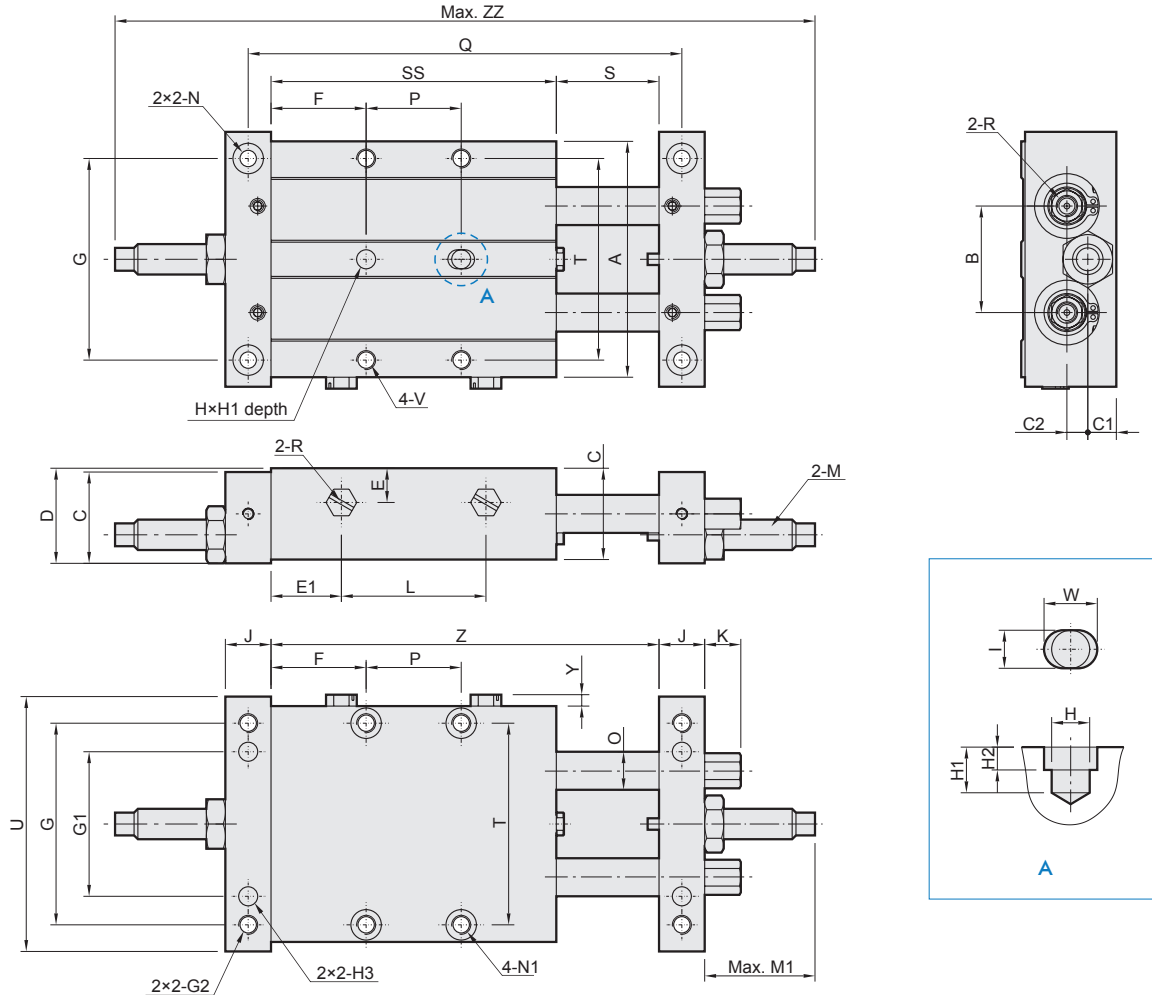


Unit: mm

Tube I.D.	Code Stroke	A	B	C	C1	C2	D	E	E1	F	G	G1	G2	H ^(H7)	H1	H2	H3 ^(H7)	I	J	K	L	M
10	25	48	22	18	6.5	2.5	19	6.5	14.5	21	40	28	M4×0.7×8dp	ø4	6	3	ø4×5dp	ø4	10	9.5	38	M8×1.0(MAC-0806-SN)
16	25	62	28	24	7.5	5.5	25	9	18.5	25	53	38	M5×0.8×10dp	ø5	6	3	ø5×6dp	ø5	12	9.5	38	M8×1.0(MAC-0806-SN)
25	25	79	35	32	9	9	34	16	19.5	28.5	67	50	M6×1.0×12dp	ø6	8	4	ø6×8dp	ø6	16	-	43	M10×1.0(MAC-1007-SN)

Tube I.D.	Code Stroke	M1	N	N1	O	P	Q	R	S	SS	T	U	V	W	Y	Z	ZZ
10	25	32.6	ø3.3thru, ø6.5×3.2dp	ø3.2thru, ø6.5×3.3dp	ø6	25	104	M5×0.8	27	67	37	52	M4×0.7×6dp	6	3	94	179.2
16	25	30.6	ø4.3thru, ø8×4.5dp	ø4.3thru, ø8×4.5dp	ø10	25	114	M5×0.8	27	75	53	67	M5×0.8×10dp	7	3	102	187.2
25	25	33	ø5.2thru, ø9.5×5dp	ø5.5thru, ø9.5×5.5dp	ø12	25	125	Rc1/8	27	82	67	84	M6×1.0×12dp	8	-	109	207

MCDB-03 $\phi 10$ stroke: 50~75 / $\phi 16, \phi 25$ stroke: 50~200

DUAL-ROD SLIDE CYLINDER

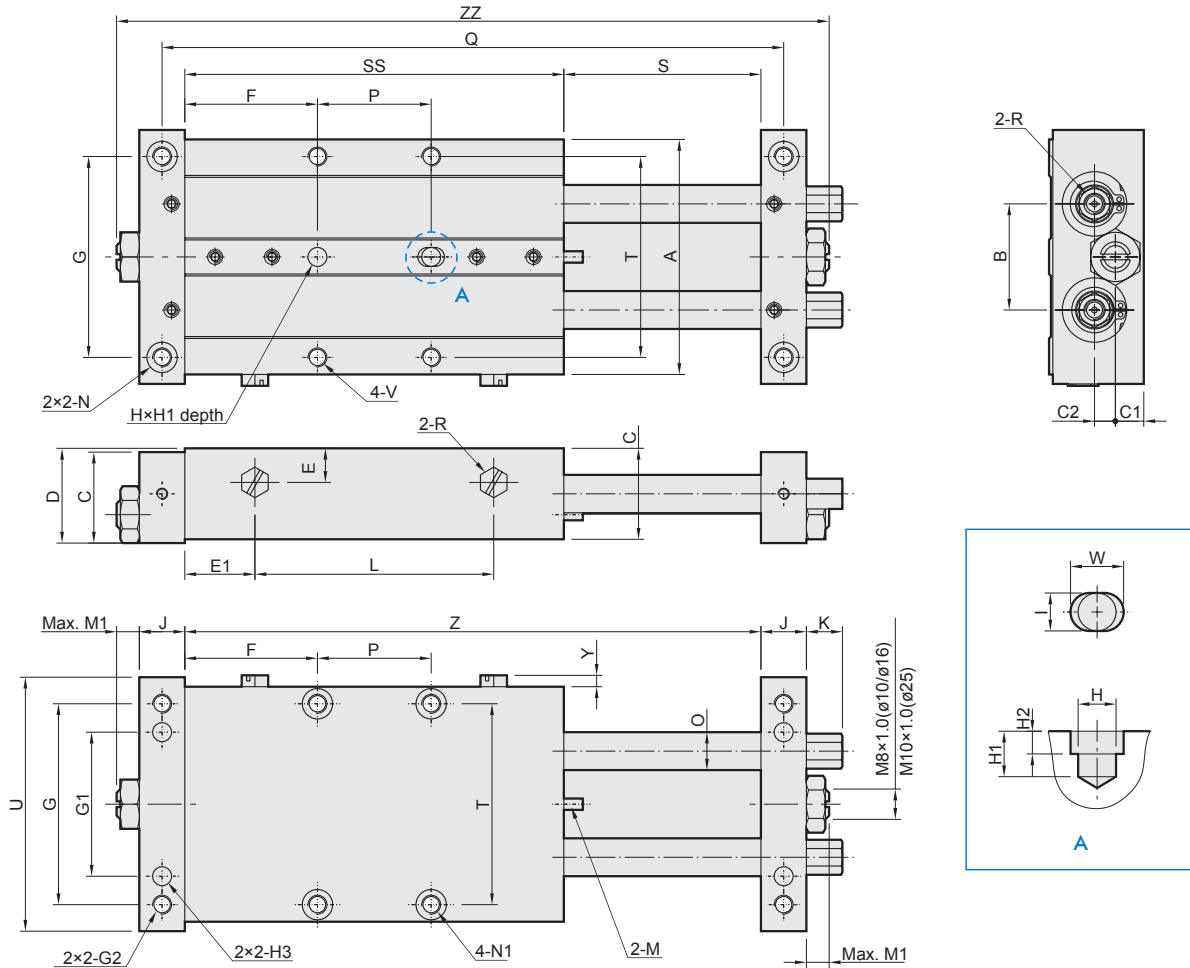

MCDB-03

Unit: mm

Tube I.D.	Code Stroke	A	B	C	C1	C2	D	E	E1	G	G1	G2	H ^(H7)	H1	H2	H3 ^(H7)	I	J	K	M	M1
10	50~75	48	22	18	6.5	2.5	19	6.5	14.5	40	28	M4×0.7×8dp	ø4	6	3	ø4×5dp	ø4	10	9.5	M8×1.0(MAC-0806-2)	8
16	50~200	62	28	24	7.5	5.5	25	9	18.5	53	38	M5×0.8×10dp	ø5	6	3	ø5×6dp	ø5	12	9.5	M8×1.0(MAC-0806-2)	6
25	50~200	79	35	32	9	9	34	16	20.5	67	50	M6×1.0×12dp	ø6	8	4	ø6×8dp	ø6	16	-	M10×1.0(MAC-1008-2)	6

Tube I.D.	Code Stroke	N	N1	O	R	T	U	V	W	Y
10	50~75	ø3.3thru, ø6.5×3.2dp	ø3.2thru, ø6.5×3.3dp	ø6	M5×0.8	37	52	M4×0.7×6dp	6	3
16	50~200	ø4.3thru, ø8×4.5dp	ø4.3thru, ø8×4.5dp	ø10	M5×0.8	53	67	M5×0.8×10dp	7	3
25	50~200	ø5.2thru, ø9.5×5dp	ø5.5thru, ø9.5×5.5dp	ø12	Rc1/8	67	84	M6×1.0×12dp	8	-

MCDB-03: $\phi 10$

Code Stroke	F	L	P	Q	S	SS	Z	ZZ
50	26	63	40	154	52	92	144	172
75	26	88	65	204	77	117	194	222

MCDB-03: $\phi 16$


Code Stroke	F	L	P	Q	S	SS	Z	ZZ
50	35	63	30	164	52	100	152	188
75	32.5	88	60	214	77	125	202	238
100	37.5	113	75	264	102	150	252	288
125	42.5	138	90	314	127	175	302	338
150	55	163	90	364	152	200	352	388
175	67.5	188	90	414	177	225	402	438
200	80	213	90	464	202	250	452	488

MCDB-03: $\phi 25$

Code Stroke	F	L	P	Q	S	SS	Z	ZZ
50	31	66	45	175	52	107	159	203
75	33.5	91	65	225	77	132	209	253
100	33.5	116	90	275	102	157	259	303
125	46	141	90	325	127	182	309	353
150	58.5	166	90	375	152	207	359	403
175	71	191	90	425	177	232	409	453
200	83.5	216	90	475	202	257	459	503

MCDB-03 $\varnothing 20$ stroke: 25 / $\varnothing 32$ stroke: 25~50

DUAL-ROD SLIDE CYLINDER

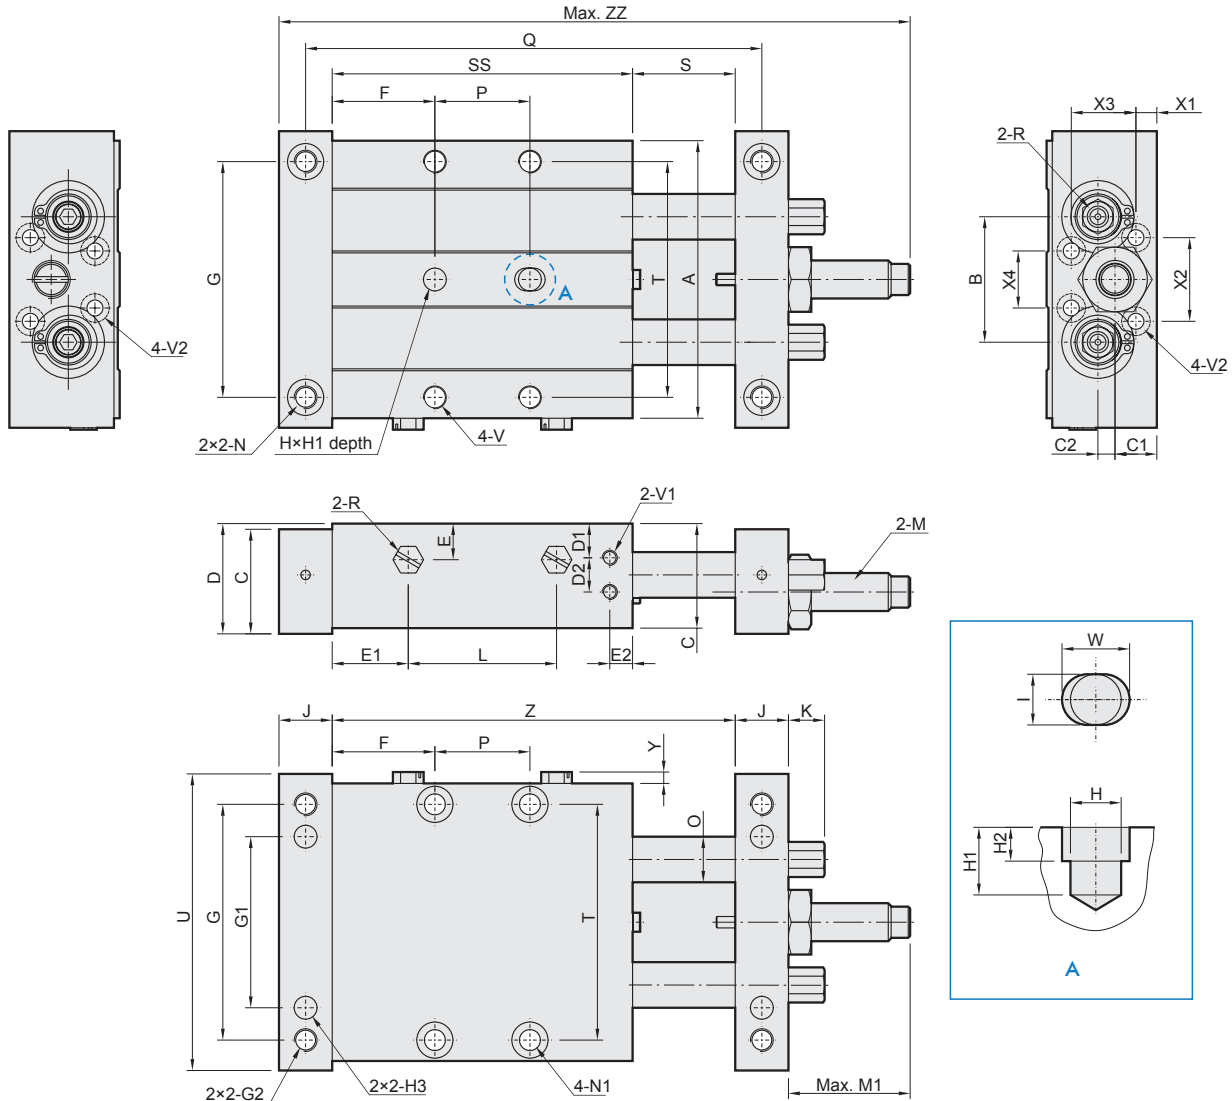

MCDB-03

Unit: mm


Tube I.D.	Code Stroke	A	B	C	C1	C2	D	D1	D2	E	E1	E2	F	G	G1	G2	H ^(H7)	H1	H2	H3 ^(H7)	I	J	K	L
20	25	73	33	27.5	11	4.5	29	9	9	9.5	20	6	27	62	45	M6×1.0×12dp	ø6	8	4	ø6×8dp	ø6	14	9.5	39
	50	113	55	38.5	13.5	7	40	10.5	12	15	27.5 28	10	37 38	105	84	M8×1.25×15dp	ø8	12	6	ø8×12dp	ø8	20	14.5	41 65

Tube I.D.	Code Stroke	M	M1	N	N1	O	P	Q	R	S	SS	T	U	V
20	25	M10×1.0(MAC-1008-2)	32	ø5.2thru, ø9.5×5dp	ø5.5thru, ø9.5×5.5dp	ø12	25	120	M5×0.8	27	79	62	78	M6×1.0×9dp
	50	M14×1.5(MAC-1412-SN)	50	ø6.9thru, ø11×6.5dp	ø6.9thru, ø11×7dp	ø20	22 45	143 193	Rc1/8	27 52	96 121	100	118	M8×1.25×15dp

Tube I.D.	Code Stroke	V1	V2	W	X1	X2	X3	X4	Y	Z	ZZ
20	25	M4×0.7×5dp	M5×0.8thru, ø7.5×4.5dp(back side)	8	5.5	22	17	15	3	106	166
	50	M6×1.0×7dp	M6×1.0thru, ø9.5×5.4dp(back side)	10	7.5	31	24.5	31	-	123 173	213 263

MCDB-03 $\varnothing 20$ stroke: 50~200 / $\varnothing 32$ stroke: 75~200

DUAL-ROD SLIDE CYLINDER

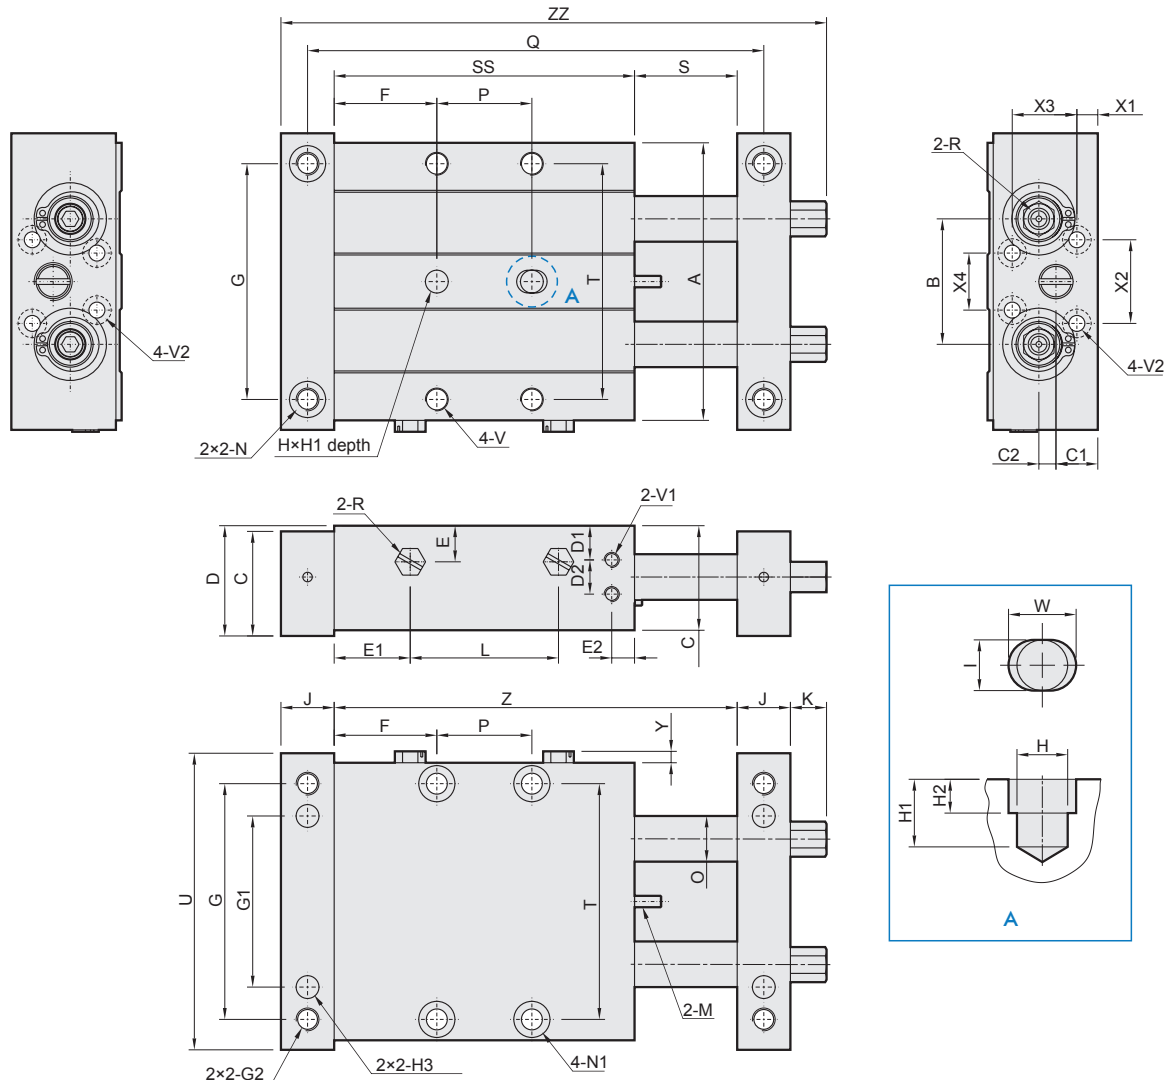

MCDB-03

Unit: mm

Tube I.D.	Code Stroke	A	B	C	C1	C2	D	D1	D2	E	E1	E2	G	G1	G2	H ^(H7)	H1	H2	H3 ^(H7)	I	J	K	M
20	50~200	73	33	27.5	11	4.5	29	9	9	9.5	20	6	62	45	M6×1.0×12dp	ø6	8	4	ø6×8dp	ø6	14	9.5	M10×1.0(MAC-1008-2)
32	75~200	113	55	38.5	13.5	7	40	10.5	12	15	28	10	105	84	M8×1.25×15dp	ø8	12	6	ø8×12dp	ø8	20	14.5	M14×1.5(MAC-1412-SN)

Tube I.D.	Code Stroke	N	N1	O	R	R1	T	U	V	V1	V2	W	X1	X2	X3	X4	Y
20	50~200	ø5.2thru, ø9.5×5dp	ø5.5thru, ø9.5×5.5dp	ø12	M5×0.8	M4×0.7×5dp	62	78	M6×1.0×9dp	M4×0.7×5dp	M5×0.8thru, ø7.5×4.5dp(back side)	8	5.5	22	17	15	3
32	75~200	ø6.9thru, ø11×6.5dp	ø6.9thru, ø11×7dp	ø20	Rc1/8	M6×1.0×7dp	100	118	M8×1.25×15dp	M6×1.0×7dp	M6×1.0thru, ø9.5×5.4dp(back side)	10	7.5	31	24.5	31	-

MCDB-03: $\varnothing 20$

Code Stroke	F	L	P	Q	S	SS	Z	ZZ
50	34.5	64	35	170	52	104	156	193.5
75	34.5	89	60	220	77	129	206	243.5
100	39.5	114	75	270	102	154	256	293.5
125	44.5	139	90	320	127	179	306	343.5
150	57	164	90	370	152	204	356	393.5
175	69.5	189	90	420	177	229	406	443.5
200	82	214	90	470	202	254	456	493.5

MCDB-03: $\varnothing 32$

Code Stroke	F	L	P	Q	S	SS	Z	ZZ
75	38	90	70	243	77	146	223	277.5
100	38	115	95	293	102	171	273	327.5
125	38	140	120	343	127	196	323	377.5
150	38	165	145	393	152	221	373	427.5
175	38	190	170	443	177	246	423	477.5
200	38	215	195	493	202	271	473	527.5