
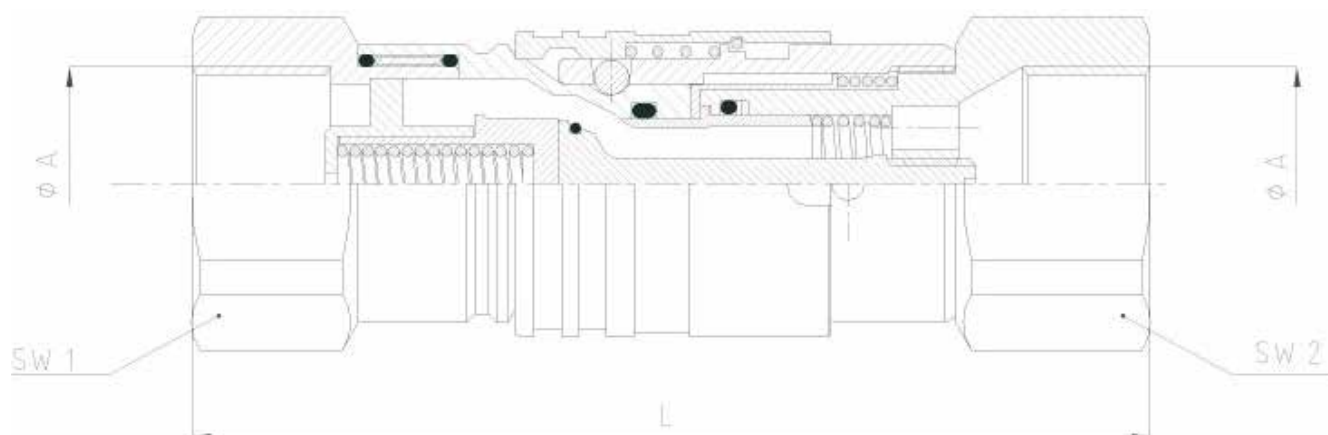


SERIE BF Flat Face Couplings

ISO 16028 standard - 316 Stainless steel

- No spillage during disconnection / No air inclusion during connection.
- Application where fluid leaks aren't allowed for ecological or safety reasons.
- Standard Threads: BSPP / else on request.
- Viton seals as standard. Other materials on request.
- PTFE Antiextrusion BK rings.
- Safety lock device.

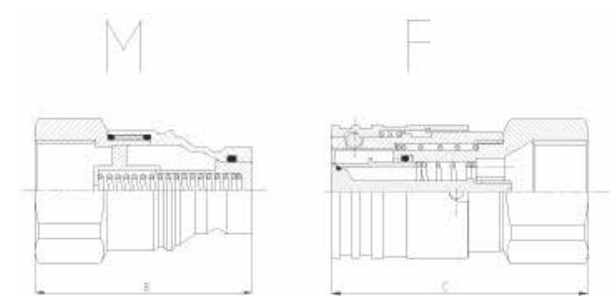

ϕA -xx (inch)	SW 1 (mm)	SW 2 (mm)	L (mm)	B (mm)	C (mm)	M (kg)	WP (bar)
1/4"-06	22	22	86	48	48	0,25	300
3/8"-09	24	27	118	67	68	0,40	250
1/2"-13	32	32	125	68	74	0,65	250
3/4"-19	36	36	130	70	79	0,75	200
1" - 25	45	45	153	82	93	1,20	150
1" 1/4-30	55	55	172,5	90	106	1,95	100
1" 1/2-40	65	65	173	112	132,5	4,50	90
2" - 50	75	75	242	124	157	8,50	60